Installation Guidelines Sheet



MLR50_TPH_SS Pull Down Grab Rail with Toilet Roll Holder

Material Specifications

Tubing: 1.2mm #304 Stainless Steel - 32mmØ
 Mounting Bracket & Brace: 2.5mm Formed #304 Stainless Steel

Dimensions

Overall: 850mmL x 315mmH

 Grab Rail: 215mmH from outer edge to edge
 Mounting Bracket: 104mmW x 315mmH x 30~50mmD x 2.5mmT

■ Mounting Holes: 7 off by 8mmØ

Installation Guidelines


- May be subject to Australian Building Code
 Regulations for height and location fixing and may
 be subject to placement as per architectural
 drawings. In all cases, this is the responsibility of the
 installer.
- Fixings and anchors are not included with the units and are the responsibility of the installer to appropriately fix the unit to the wall.
- 1. Hold the unit on a wall in the desired location, and mark the 7 mounting holes.
- 2. Secure unit to wall using suitable fixings and ensure that the mounting flange is flat against the wall.
- 3. To finish installation, check that the grab rail moves easily from the horizontal position to the upright position. Ensure that the grab rail does not fall down when in the upright position.
- **4.** Apply a small amount of pressure to release the grab rail from upright position and lower it back to the horizontal position.


Operation

 Grab rail can be lowered into a horizontal position when in use, and folded into an upright position for storage.

Safety Warning

Ensure that there is proper structure support
within the wall. Grab rails are no stronger than
the anchors and walls to which they are
attached. Grab rails must be firmly secured in
order to support the loads for which they are
intended.

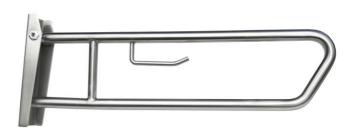

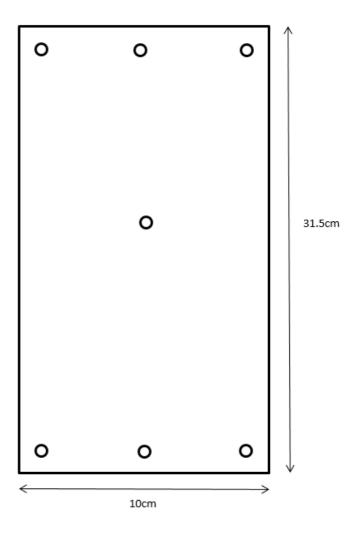

The photographs and line drawings of the products presented above are representational only.

Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.

Installation Guidelines Sheet



Features

 Grab rail comes pre-tensioned, can be tensioned as desired using an Allen Key.



NOTE:

- This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.
- It is the responsibility of the installer to ensure that the surface/substrate that the unit is installed upon and the fixings used are suitable to withstand the weight bearing loads of the unit and if required as per AS1428 / Australia building code regulations.
- Compliant with the Force Requirements within AS1428.1:2021, Section 14.

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any Commercial product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.

The photographs and line drawings of the products presented above are representational only.

Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.