


CLEANING AND MAINTENANCE GUIDE ML_BSB380 ALUMINIUM ADJUSTABLE BENCH SEAT BRACKET

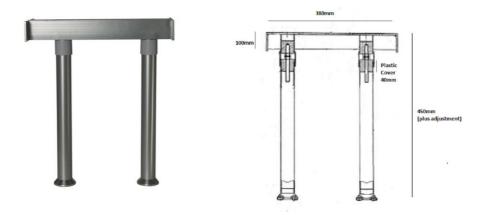

Keeping your Metlam Australia Aluminium Product Clean

For more information on cleaning & maintenance of your Metlam Australia products visit our YouTube Channel

- * Metlam Aluminium Products look best if it's cleaned regularly with a damp cloth.
- * Drying afterwards makes sure streaky marks aren't left behind.
- * Routine cleaning prevents any stubborn stains building up.

WHAT TO USE

For day to day cleaning <u>fresh water</u>, mild detergent and a cloth is all that is required. **Do not use bleach** – it's just too easy to make the solution too strong making it difficult to properly rinse it off the surface afterwards. After cleaning, wipe the surface dry with a soft absorbent cloth.

AVOID SCRATCHES

Metlam Aluminium Products can be scratched by careless handling or aggressive scrubbing. Avoid dragging rough items across the surface and be aware that grit, trapped under other materials, can actually cause surface scratches.

CHEMICAL REACTION

If left in contact with corrosive agents for extended periods, Metlam Aluminium products may be compromised. Applying a regular maintenance/cleaning schedule as outlined above using only <u>fresh</u> water, will minimise any potential problems.

Note: Chlorine has a corrosive effect on aluminium, therefore a minimum 2 metre distance from chlorinated water is highly recommended for leisure centre/ swimming pool projects. Further, janitorial/cleaning staff should note that washing down this product with chlorinated water would contribute to its loss of integrity. Any corrosion from chlorinated water would void the <u>Metlam</u>

The photogra Australia Warranty. ducts presented above are representational only.

Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions

Information Sheet



DO NOT

- * Rub with steel wool (wire wool) or scraping with steel tools
- * Use scourers and cleaning cloths that have been used on ordinary steel
- * Rub plastic scourers across the grain of brushed surfaces
- * Use concentrated bleach or hydrochloric acid-based cleaning products
- * Use products with chlorine bleach, hydrochloric or muriatic acid

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any TPH product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.

The photographs and line drawings of the products presented above are representational only.

Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.