

Metlam Australia Hand Dryers



It's time to discover the difference



Over 25 Years of Trusted Washroom Solutions

For over 25 years, Metlam Australia has been proudly Australian-owned and managed, supplying quality commercial washroom solutions across Australia. We specialise in Commercial Washroom Accessories and Toilet Partition Hardware for the commercial, residential, hospitality, healthcare, education, aged care, security, and public facilities sectors.

Our Hand Dryers

Metlam Australia's hand dryer range offers fast, efficient, reliable, and cost-effective solutions for every project. Featuring innovative Australian design, the range includes everything from slimline contemporary models to ultra-efficient automatic high-velocity hand dryers.

Designed to deliver performance, hygiene, and value, Metlam Australia hand dryers are suited to a wide variety of commercial washroom environments. Whatever your project requirements, you can rely on Metlam Australia to provide a quality hand drying solution backed by over two decades of industry experience.



Our products are suitable for



Commercial/Industrial Facilities



Health and Aged Care



Hospitality and Leisure Facilities



Residential Facilities



Educational Facilities




Accessible Compliant



Public Facilities

ML_3000_BLK

Automatic Operation ABS Hand Dryer

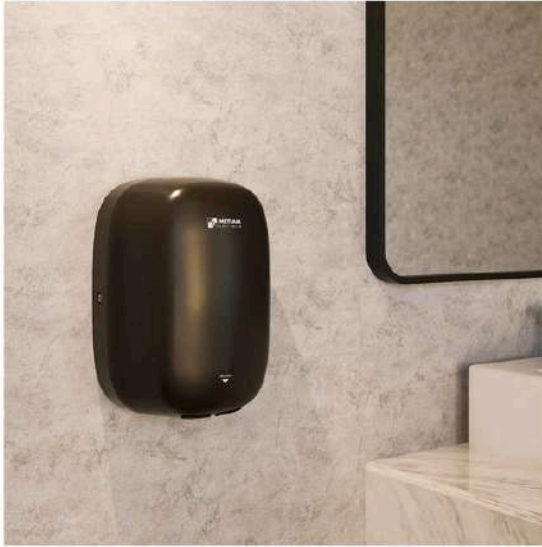

840W AUTO HAND DRYER

12 seconds or less
drying time



SECURITY

Theft-Resistant Case
(2x Star Screws)



ABS CASE

Durable, Chemical
Stability



LOW NOISE

63-70.2db (± 1.4)
@ 1m



HYGIENIC

Touch-free
Automatic



ENERGY EFFICIENT

Low Power
Consumption



THERMAL PROTECTION

Auto-Resetting
Thermostat

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- ABS (Designer Black)
- Surface Mount Concealed Fix
- 2kg net weight

MOTOR

- Brushed 420W
- 21,000 - 35,000 RPM
- 50 Seconds auto shut off

ELECTRICAL

- 840W, 3.7A
- 220-240 V AC, 50/60Hz
- 2.8Wh Energy Per Dry
- $\leq 1W$ Standby Power
- 240-920W Rated Power

IP RATING

IP23

OUTPUT

- 216-345Km/h Air Speed
- 23l/s Operating Airflow
- 63-70.2dB(± 1.4) @ 1m


WARRANTY

- 5 (Five) years for Parts only and
- 3 (Three) years for Replacement or Repair

SPARE PART

- Replacement Printed Circuit Board = ML_3000_PCB
- Replacement Sensor Module = ML_3000_SENSOR
- Replacement Motor = ML_3000_MOTOR

TECHNICAL DIMENSIONS

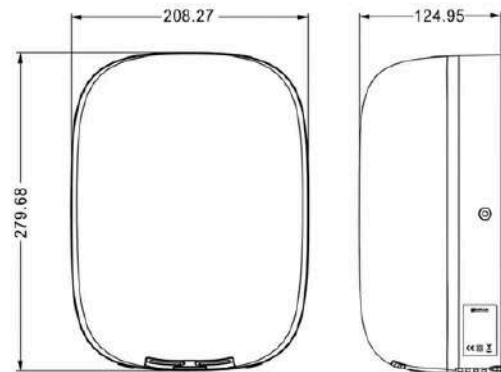

IDEAL FOR



Shopping
Centres



Airports



Universities



Hospitals



Commercial
Offices



Public
Amenities

SAFETY APPROVALS

CB CE




METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.

ML_3000_WHT

Automatic Operation ABS Hand Dryer

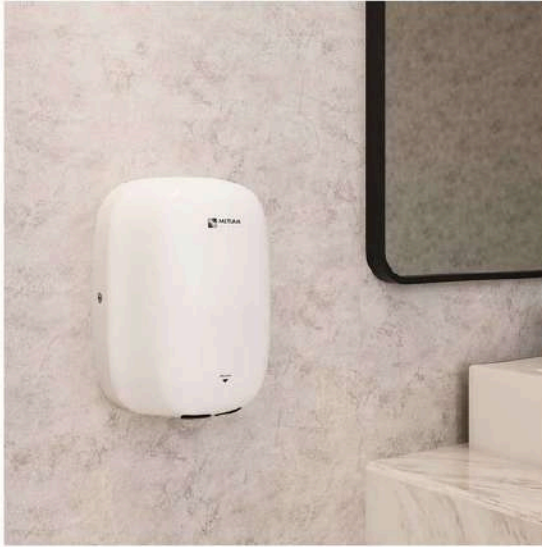

840W AUTO HAND DRYER

12 seconds or less drying time



CASE SECURITY

Theft-Resistant Case (2x Star Screws)



ABS CASE

Durable, Chemical Stability



LOW NOISE

63-70.2db (± 1.4) @ 1m



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



THERMAL PROTECTION

Auto-Resetting Thermostat

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- ABS (White)
- Surface Mount Concealed Fix
- 2kg net weight

MOTOR

- Brushed 420W
- 21,000 - 35,000 RPM
- 50 Seconds auto shut off

ELECTRICAL

- 840W, 3.7A
- 220-240 V AC, 50/60Hz
- 2.8Wh Energy Per Dry
- $\leq 1W$ Standby Power
- 240-920W Rated Power

IP RATING

IP23

OUTPUT

- 216-345Km/h Air Speed
- 23l/s Operating Airflow
- 63-70.2dB(± 1.4) @ 1m


WARRANTY

- 5 (Five) years for Parts only and
- 3 (Three) years for Replacement or Repair

SPARE PART

- Replacement Printed Circuit Board = ML_3000_PCB
- Replacement Sensor Module = ML_3000_SENSOR
- Replacement Motor = ML_3000_MOTOR

TECHNICAL DIMENSIONS

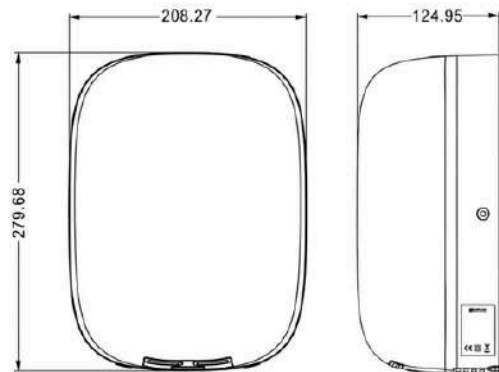

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS

CB CE



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECLIPSE_SS

Slimline Automatic Operation Hand Dryer



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

Satin finish, Corrosion resistant



LOW NOISE

68.6-72.3dB (A)



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



THERMAL PROTECTION

Auto-Resetting Thermostat



POWERFUL

High-Flow Dual Air Outlets

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm #304 Satin Stainless Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 4.2kg net weight

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 220-240V AC, 50/60Hz
- 1000W
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- 85°C auto resetting thermostat
- 141°C auto reset safety cut off


OUTPUT

- Speed: 95-115m/s (adjustable), Temp: Ambient +30°
- 60 sec power cut off, auto reset
- Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years - Incorporating THREE (3) years for Replacement or Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

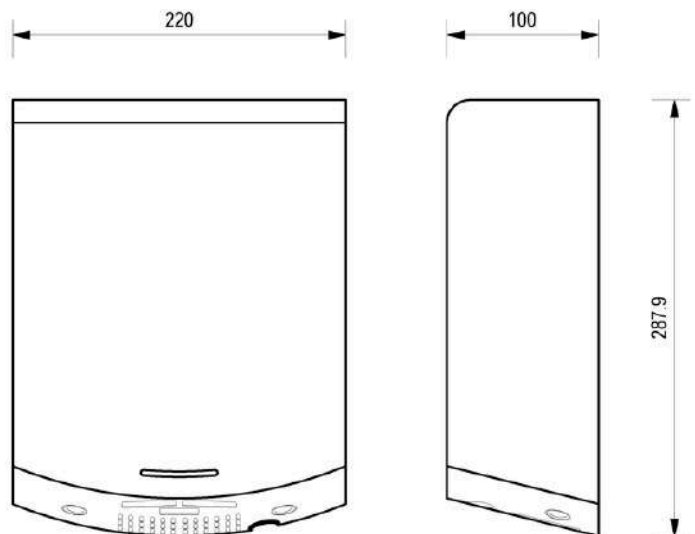

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS

CB CE



GREEN CERTIFICATE



WEEE RoHS



METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECLIPSE_WHT

Slimline Automatic Operation Hand Dryer



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

White Powder Coat, Corrosion resistant



LOW NOISE

68.6-72.3dB (A)



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



THERMAL PROTECTION

Auto-Resetting Thermostat



POWERFUL

High-Flow Dual Air Outlets

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm #304 White Powder Coat Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 4.2kg net weight

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 220-240V AC, 50/60Hz
- 1000W
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- 85°C auto resetting thermostat
- 141°C auto reset safety cut off


OUTPUT

- Speed: 95-115m/s (adjustable), Temp: Ambient +30°
- 60 sec power cut off, auto reset
- Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

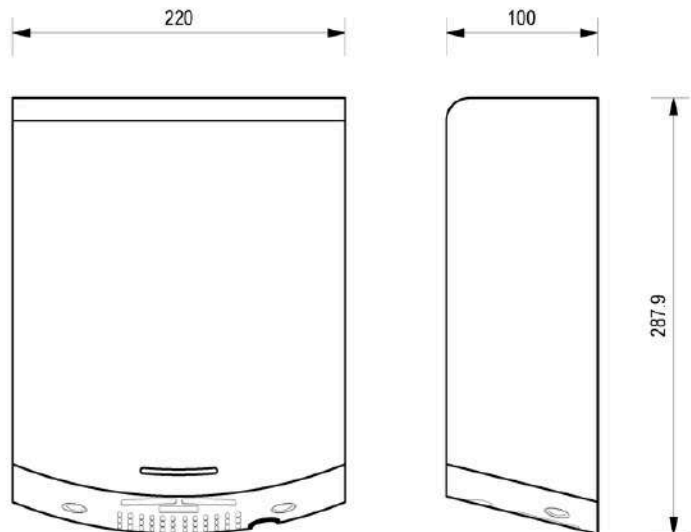

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS

CB CE



GREEN CERTIFICATE



WEEE RoHS




METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECLIPSE_DESIGNER

Slimline Automatic Operation Hand Dryer

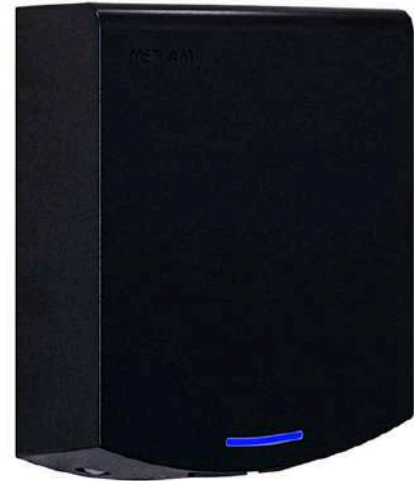

1000W AUTO HAND DRYER

Less than 15 seconds drying time



POWDER COAT STEEL

Designer Matte Black, Corrosion resistant



LOW NOISE

68.6-72.3dB (A)



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



THERMAL PROTECTION

Auto-Resetting Thermostat



POWERFUL

High-Flow Dual Air Outlets

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm Designer Matte Black Powder Coat Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 4.2kg net weight

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 220-240V AC, 50/60Hz
- 1000W
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- 85°C auto resetting thermostat
- 141°C auto reset safety cut off


OUTPUT

- Speed: 95-115m/s (adjustable), Temp: Ambient +30°
- 60 sec power cut off, auto reset
- Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

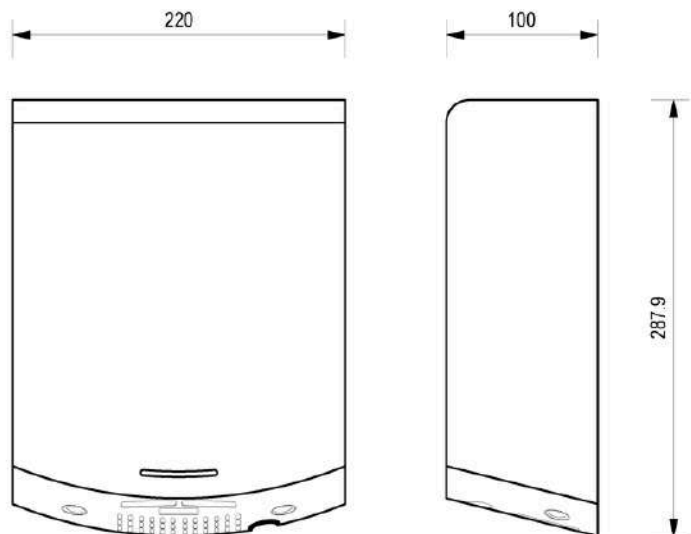

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS

CB CE



WEEE RoHS



METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECOSLENDER_SS

Slimline Eco Automatic Operation Hand Dryer



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

Satin finish, Corrosion resistant



QUIET OPERATION

Adjustable Sound Level



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



POWERFUL

High-Flow Dual Air Outlets



SLEEK DESIGN

Contemporary Curved Profile

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm #304 Satin Stainless Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 3.8kg net weight
- Max 4" from the wall
- Fewer Materials save resource

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 240V, 50Hz, 1000W
- 0.3-0.4W Standby Power
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- ON/OFF heating Options, 85°C auto resetting thermostat
- 142°C auto reset safety cut off


OUTPUT

- Air Speed: 70-82m/s (adjustable), Temp: Ambient +25°C
- 60 sec power cut off, auto reset
- Sensor: Infrared Automatic, Self Adjusting, 170mm +/- 20mm, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

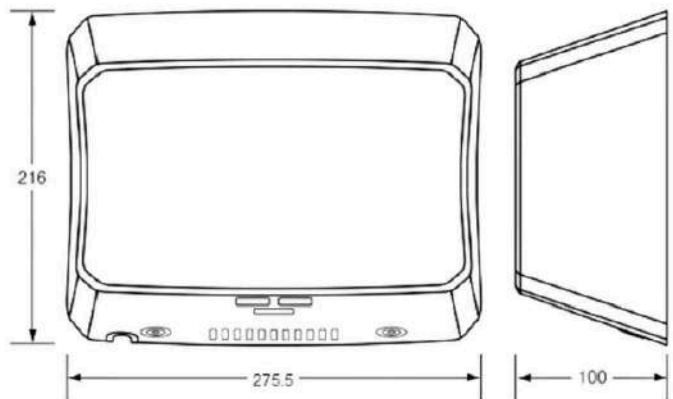

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS



WEEE RoHS

Green Certificates



METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECOSLENDER_WHT

Slimline Eco Automatic Operation Hand Dryer



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

White Powder Coat, Corrosion resistant



QUIET OPERATION

Adjustable Sound Level



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



POWERFUL

High-Flow Dual Air Outlets



SLEEK DESIGN

Contemporary Curved Profile

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm #304 White Powder Coat Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 3.8kg net weight
- Max 4" from the wall
- Fewer Materials save resource

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 240V, 50Hz, 1000W
- 0.3-0.4W Standby Power
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- ON/OFF heating Options, 85°C auto resetting thermostat
- 142°C auto reset safety cut off


OUTPUT

- Air Speed: 70-82m/s (adjustable), Temp: Ambient +25°C
- 60 sec power cut off, auto reset
- Sensor: Infrared Automatic, Self Adjusting, 170mm +/- 20mm, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

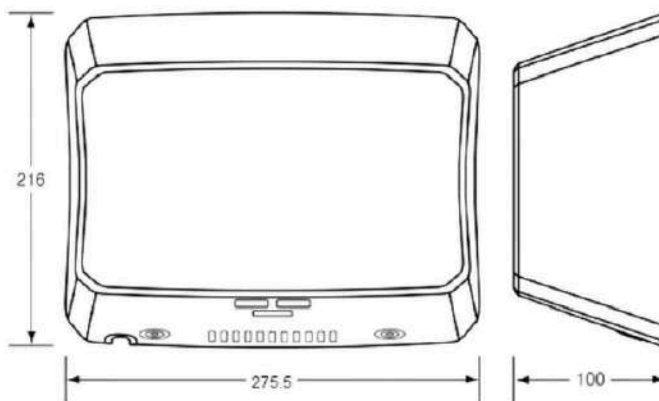

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS



WEEE RoHS

Green Certificates



METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECOSLENDER_DESIGNER

Slimline Eco Automatic Operation Hand Dryer



1000W AUTO HAND DRYER

Less than 15 seconds drying time



POWDER COAT STEEL

Designer Matte Black, corrosion resistant



QUIET OPERATION

Adjustable Sound Level



HYGIENIC

Touch-free Automatic



ENERGY EFFICIENT

Low Power Consumption



POWERFUL

High-Flow Dual Air Outlets



SLEEK DESIGN

Contemporary Curved Profile

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm Designer Matte Black Powder Coat Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 3.8kg net weight
- Max 4" from the wall
- Fewer Materials save resource

MOTOR

- 250-500W Brush Type: Dual Ball Bearing
- 16,000-29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 240V, 50Hz, 1000W
- 0.3-0.4W Standby Power
- 325 - 500W Adjustable element

IP RATING

IP 24

HEATER

- ON/OFF heating Options, 85°C auto resetting thermostat
- 142°C auto reset safety cut off


OUTPUT

- Air Speed: 70-82m/s (adjustable), Temp: Ambient +25°C
- 60 sec power cut off, auto reset
- Sensor: Infrared Automatic, Self Adjusting, 170mm +/- 20mm, Blue LED indicates operation/range

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

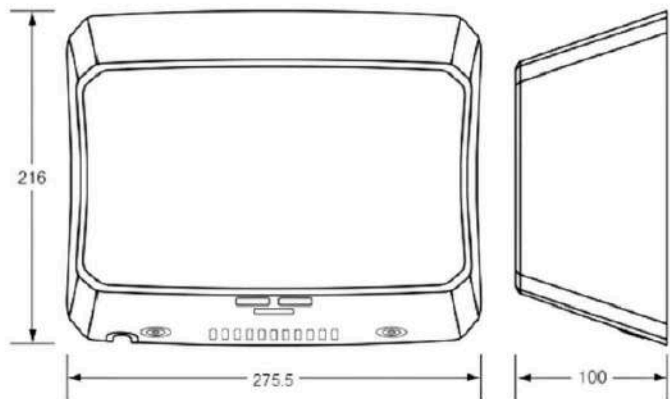

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS



WEEE RoHS

Green Certificates



METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.

ML_100N_SS

Slimline Automatic Operation Hand Dryer



2200W AUTO HAND DRYER

Less than 15 seconds drying time



SECURITY

Theft-Resistant Case (2x security pin hex screws)



304 GRADE STAINLESS STEEL

Satin finish, Corrosion resistant



LOW NOISE

70dB(A) @ 1m



HYGIENIC

Touch-free Automatic



SLIM DESIGN

Space Optimization



THERMAL PROTECTION

Auto-Resetting Thermostat

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 1.2mm #304 Satin Stainless Steel
- 2 SS theft resistant hex drive screws (hex key supplied)
- 4.5kg net weight

MOTOR

- 1/4 HP
- 7500 RPM, Brush Type
- Dual Ball Bearing Motor
- Auto Resetting Thermostat turns off at 105°C

ELECTRICAL

- 230-240 Vac, 50/60Hz
- 2200-2400W
- 2200W @240VAC

IP RATING

IP23

HEATER

- 87°C auto resetting thermostat
- 141°C auto reset safety cut off


OUTPUT

- 314.5 m³/h (185 CFM), Temp: Ambient +20°C
- 60 sec power cut off, auto reset
- 2 sec delay turn off after last read
- Adjustable sensor, standard 18cm ±2cm

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

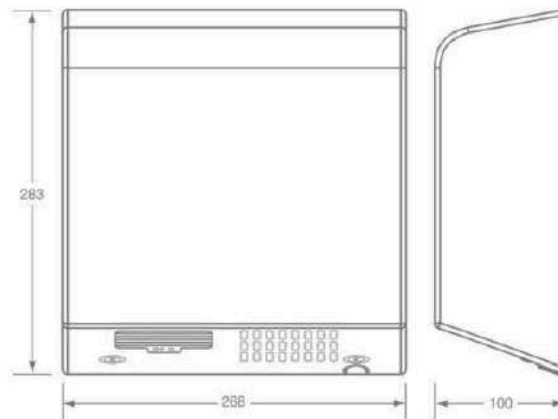

IDEAL FOR



Shopping
Centres



Airports



Universities



Hospitals



Commercial
Offices



Public
Amenities

SAFETY APPROVALS



METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.

ML_1800_WHT

Automatic Operation ABS Hand Dryer



1800W AUTO HAND DRYER

30-35 seconds drying time



CASE SECURITY

Theft-Resistant Case (2x Security pin hex Screws)



ABS CASE

Durable, Chemical Stability



LOW NOISE

64dB(A) @ 1m



HYGIENIC

Touch-free Automatic



SLEEK DESIGN

Contemporary Curved Profile



THERMAL PROTECTION

Auto-Resetting Thermostat

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- 3.0 White High-Grade Fire Retardant ABS
- Surface Mount Concealed Fix
- 3.5kg net weight

MOTOR

- Brushless 80W
- 2850 RPM
- 105° auto reset overload

ELECTRICAL

- 1800W, 7.5A
- 240 V, 50Hz

IP RATING

IP21

HEATER

- 87°C auto resetting thermostat
- 142°C auto reset safety cut off

OUTPUT

- 20.5m/s Air Speed
- Ambient +20° Temperature
- 60 seconds power cut off auto reset
- 2 seconds delay turn off after last read


SENSOR RANGE

- Auto Infrared - 180mm +/-20mm preset, 100 - 300mm adjust

WARRANTY

Warranty for the Term of FIVE (5) Years -
Incorporating THREE (3) years for Replacement or
Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

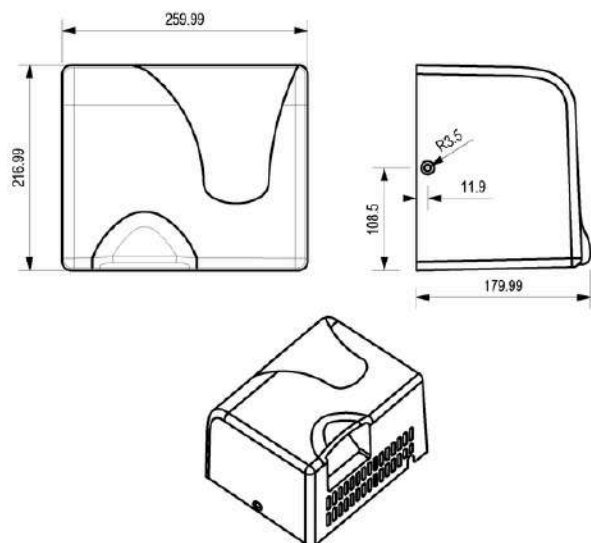

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities

SAFETY APPROVALS

CB CE



EMC

LVD



WEEE RoHS



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECO_73N1SM

Recessed Paper Towel Dispenser, Hand Dryer & Waste Receptacle



1000W AUTO HAND DRYER

EcoFast Auto Dryer,
Less than 15 seconds



304 GRADE STAINLESS STEEL

Satin finish, Seamless
weld, rolled edges



HYGIENIC & EASY TO MAINTAIN



LOCK & KEY SECURITY



SUSTAINABLE & RELIABLE



EFFICIENT

All-in-one Design

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- #304 Satin Stainless Steel
- 1625mmH x 318mmW x 141.5mmD Overall Size
- Unit is to be hard wired by licensed electrician. Unit is supplied with 2 keys

MOTOR

- 250-500W Brush Type, Dual Ball Bearing
- 29,000 RPM
- 95°C auto resetting safety overload thermostat

ELECTRICAL

- 240V, 50Hz, 1000W, 4.17A
- Hard wired - 4 electrical cable entry points available

IP RATING

IP11

HEATER

- 85°C auto reset safety cut off

OUTPUT

- Speed: 90m/s, Temp: Ambient +30°C
- 60 sec power cut off, auto reset
- Sensor: Infrared Automatic, Self Adjusting, 170mm+/-20mm, Blue LED indicates operation/range

DISPENSER / OPTION

- 300 Interfold paper towels, 500 Interleaved paper towels


DISPOSAL

- 20L Removable Stainless Steel waste container

WARRANTY

Warranty for the Term of FIVE (5) Years - Incorporating THREE (3) years for Replacement or Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

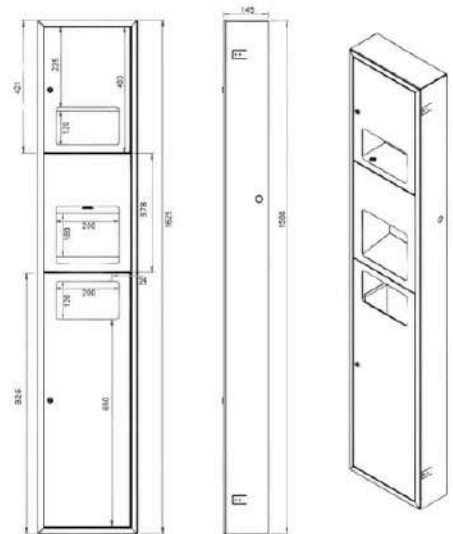

IDEAL FOR



Shopping
Centres



Airports



Universities



Hospitals



Commercial
Offices



Public
Amenities



METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.

ML_ECO_73N1REC

Recessed Paper Towel Dispenser, Hand Dryer & Waste Receptacle



1000W AUTO HAND DRYER

EcoFast Auto Dryer,
Less than 15 seconds



304 GRADE STAINLESS STEEL

Satin finish, Seamless
weld, rolled edges



HYGIENIC & EASY TO MAINTAIN



LOCK & KEY SECURITY



SUSTAINABLE & RELIABLE



EFFICIENT

All-in-one Design

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- #304 Satin Stainless Steel
- 1625mmH x 318mmW x 141.5mmD Overall Size
- 1600mmH x 290mmW x 145mmD Wall Opening
- Unit is to be hard wired by licensed electrician. Unit is supplied with 2 keys

MOTOR

- 250-500W Brush Type, Dual Ball Bearing
- 29,000 RPM
- 95°C auto resetting safety overload thermostat

ELECTRICAL

- 240V, 50Hz, 1000W, 4.17A
- Hard wired - 4 electrical cable entry points available

IP RATING

IP11

HEATER

- 85°C auto reset safety cut off

OUTPUT

- Speed: 90m/s, Temp: Ambient +30°C
- 60 sec power cut off, auto reset
- Sensor: Infrared Automatic, Self Adjusting, 170mm +/- 20mm, Blue LED indicates operation/range

DISPENSER / OPTION

- 300 Interfold paper towels, 500 Interleaved paper towels


DISPOSAL

- 20L Removable Stainless Steel waste container

WARRANTY

Warranty for the Term of FIVE (5) Years - Incorporating THREE (3) years for Replacement or Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

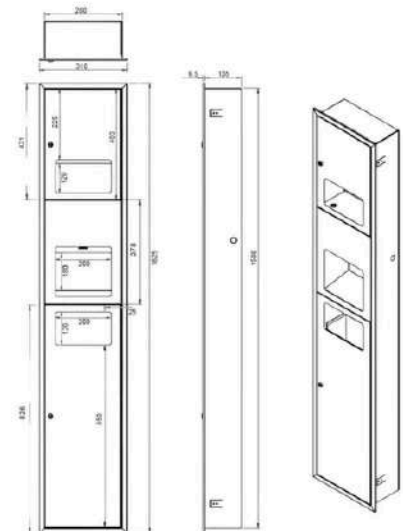

IDEAL FOR



Shopping
Centres



Airports



Universities



Hospitals



Commercial
Offices



Public
Amenities



METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.

ML_ECLIPSE_3N1SM_D

Surface Mounted Paper Towel Dispenser, Hand Dryer & Waste Receptacle



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

Satin finish, Seamless weld, rolled edges



HYGIENIC & EASY TO MAINTAIN



LOCK & KEY SECURITY



SUSTAINABLE & RELIABLE



EFFICIENT

All-in-one Design

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- #304 Satin Stainless Steel
- 1500mmH x 318mmW x 190mmD Overall Size
- Unit is to be hard wired by licensed electrician. Unit is supplied with 2 keys

MOTOR

- 250-500W Brush Type, Dual Ball Bearing
- 29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 240V, 50Hz, 1000W
- Hard wired - 4 electrical cable entry points available

IP RATING

IP 24

HEATER

- 85°C auto reset safety cut off

OUTPUT

- Speed: 92m/s, Temp: Ambient +25°C
- 60 sec power cut off, auto reset

DISPENSER / OPTION

- 300 Interfold paper towels, 500 Interleaved paper towels


DISPOSAL

- 21L Removable Stainless Steel waste container

WARRANTY

Warranty for the Term of FIVE (5) Years - Incorporating THREE (3) years for Replacement or Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

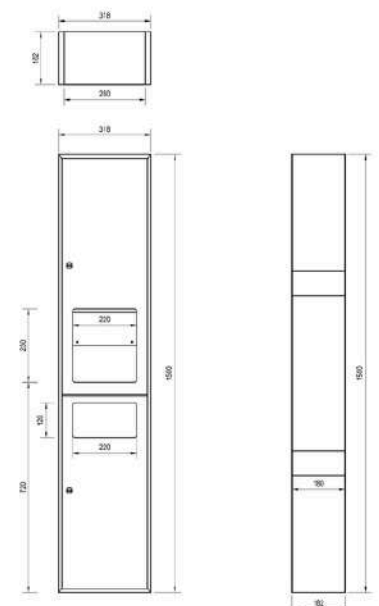

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities



METLAM
AUSTRALIA



*Accessible compliant when installed in accordance with AS1428.1 guidelines.

ML_ECLIPSE_3N1REC_D

Recessed Paper Towel Dispenser, Hand Dryer & Waste Receptacle



1000W AUTO HAND DRYER

Less than 15 seconds drying time



304 GRADE STAINLESS STEEL

Satin finish, Seamless weld, rolled edges



HYGIENIC & EASY TO MAINTAIN



LOCK & KEY SECURITY



SUSTAINABLE & RELIABLE



EFFICIENT

All-in-one Design

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- #304 Satin Stainless Steel
- 1500mmH x 318mmW x 190mmD Overall Size
- 1472mmH x 250mmW x 192mmD Wall Opening
- Unit is to be hard wired by licensed electrician. Unit is supplied with 2 keys

MOTOR

- 250-500W Brush Type, Dual Ball Bearing
- 29,000 RPM
- 95°C Auto reset Overload

ELECTRICAL

- 240V, 50Hz, 1000W
- Hard wired - 4 electrical cable entry points available

IP RATING

IP 24

HEATER

- 85°C auto reset safety cut off

OUTPUT

- Speed: 92m/s, Temp: Ambient +25°C
- 60 sec power cut off, auto reset

DISPENSER / OPTION

- 300 Interfold paper towels, 500 Interleaved paper towels


DISPOSAL

- 21L Removable Stainless Steel waste container

WARRANTY

Warranty for the Term of FIVE (5) Years - Incorporating THREE (3) years for Replacement or Repair and TWO (2) further years for Parts only.

TECHNICAL DIMENSIONS

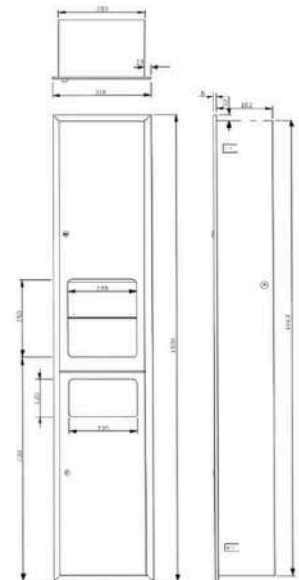

IDEAL FOR



Shopping Centres



Airports



Universities



Hospitals



Commercial Offices



Public Amenities






METLAM
AUSTRALIA





*Accessible compliant when installed in accordance with AS1428.1 guidelines.

Integrated Mirror Cabinet

A modern bathroom vanity featuring a long, white marble countertop with integrated sinks and chrome faucets. A large, frameless mirror spans the wall above the vanity, reflecting the interior of the bathroom, which includes a glass-enclosed shower area and a wall-mounted toilet. The vanity is supported by dark, minimalist cabinets. The ceiling is equipped with recessed circular lights, and a long, illuminated strip is visible above the mirror. A small potted plant sits on the right side of the countertop.

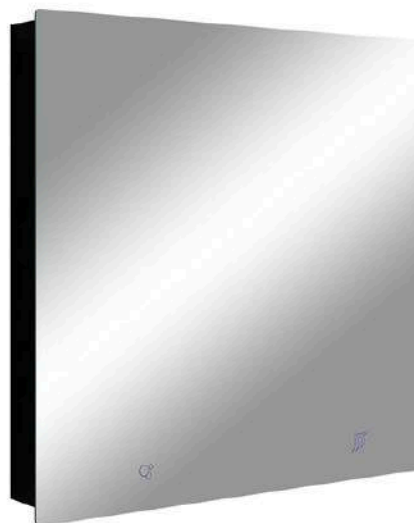

Technical drawing of a cantilever beam. The drawing shows a horizontal beam of length 900 and a vertical support of height 659. The base of the support has a width of 125. The beam is supported by a vertical post, and the dimensions are indicated with arrows and numbers.



Shopping Centres



CB C €



METLAM
AUSTRALIA




***Accessible compliant when installed in accordance with AS1428.1 guidelines.**

ML_IMC3_LUX

Integrated Mirror Cabinet

Premium all-in-one Washroom solution

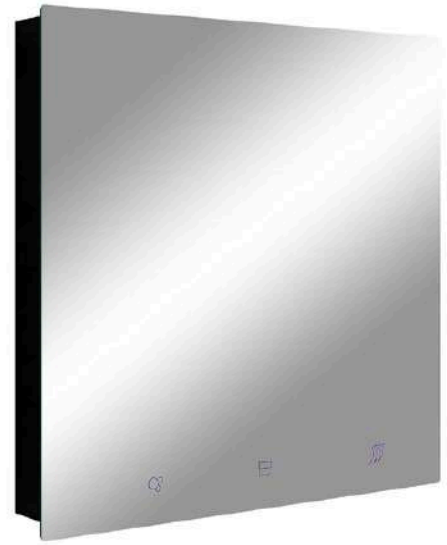

**1000W AUTO
HAND DRYER**
15 seconds
drying time



**1000ML AUTO
SOAP DISPENSER**
Hygienic touch-free
operation



**INTEGRATED PAPER
TOWEL DISPENSER**
Convenient and
efficient



**5mm THICK
FRAMELESS GLASS**
Premium look and
durability



**LED
BACKLIGHTING**
Enhances visibility
and style



**LOCK & KEY
SECURITY**
Tumbler lock for
security



**TWIN-DAMPED GAS
SPRING OPENING**
Smooth and durable



**304 GRADE
STAINLESS STEEL**
Satin finish,
Corrosion resistant

TECHNICAL SPECIFICATIONS

CONSTRUCTION

1.2mm #304 Satin Stainless Steel
5mm Frameless glass

HAND DRYER

- 1000W, 220V-250V
- Automatic Sensor Hand Dryer
- 15 Seconds Drying Time
- Integrated Power Board

SOAP DISPENSER

- 1000ml Capacity
- Automatic Sensor Dispensing

ELECTRICAL

- 220V-250V
- 10 Amp
- Adaptor Included


INSTALLATION

- Wall Mounted
- Mirror supported by Twin-Damped Gas Spring

WARRANTY

2 Years Warranty.
Hand Dryer comes with Full
Replacement Warranty.

TECHNICAL DIMENSIONS

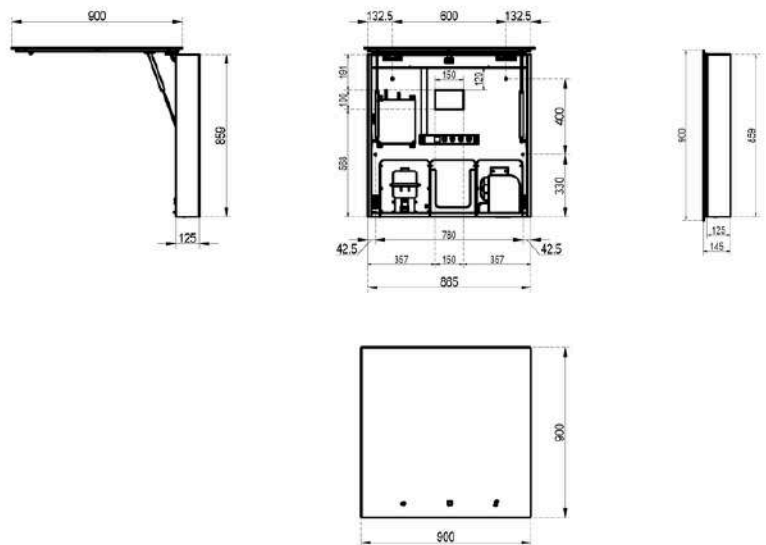

IDEAL FOR



Shopping
Centres



Airports



Universities



Hospitals



Commercial
Offices



Public
Amenities

SAFETY APPROVALS

CB CE



EMC

LVD



METLAM
AUSTRALIA



*Accessible compliant when installed in
accordance with AS1428.1 guidelines.



Ashmore Shopping Centre
QLD



Optus Stadium
WA




Maryborough Highlands Society
VIC



Mythos Psarki Bar
VIC

DESIGNED TO BE SPECIFIED

Metlam Australia hand dryers have been selected for a diverse range of architectural projects from landmark venues and hospitality spaces to cultural, commercial and community facilities.

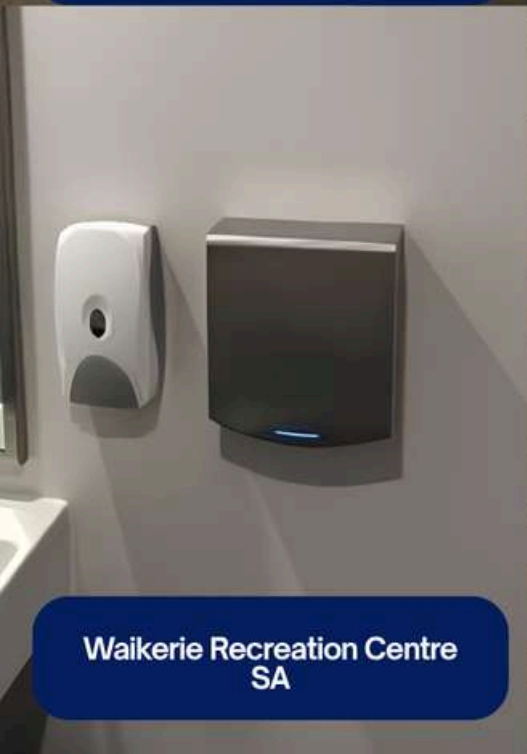

Waikerie Recreation Centre
SA



146 Marsden Street, Parramatta
NSW



Hotel Esplanade
VIC



METLAM
AUSTRALIA

For Further information on Metlam Australia's product range please contact us at:

HEAD OFFICE

17 Parkers Road New Gisborne, Vic 3438
Tel: 1300 METLAM (1300 638 526)
Email: sales@metlam.com.au

NSW (Incorporating ACT)

Sydney Branch
Unit 23, 66 Turner Road Smeaton Grange, NSW 2567
Tel: 02 8778 8801
Email: nswsales@metlam.com.au
Email: actsales@metlam.com.au

QUEENSLAND

Brisbane Branch
Shop 2, 57-59 Rosemount Terrace Windsor QLD, 4030
Tel: 07 3247 0200
Email: qldsales@metlam.com.au

VICTORIA (Incorporating TAS)

Melbourne Branch
22 Gallivan Road New Gisborne, Vic 3438
Tel: 03 5420 8800
Email: vicsales@metlam.com.au
Email: tassales@metlam.com.au

WESTERN AUSTRALIA

Perth Branch
Unit 1, 5 Bramall Street East Perth, WA 6004
Tel: 08 6250 2601
Email: wasales@metlam.com.au

SOUTH AUSTRALIA & NORTHERN TERRITORY

Adelaide, South Australia
Tel: 0407 553 045
Email: sasales@metlam.com.au
Email: ntsales@metlam.com.au

NEW ZEALAND

Head Office
17 Parkers Road New Gisborne, Vic 3438
Tel: 0407 863 730
Email: sales@metlam.com.au

INTERNATIONAL SALES

Head Office
17 Parkers Road New Gisborne, Vic 3438
Tel: 1300 METLAM (1300 638 526)
Email: sales@metlam.com.au

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any commercial product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.